

Item # _____

Quantity _____



DIPO Induction USA

1522 D Williamsburg Place

Troy, Ohio 45373

T 937.552.7138 F 866.497.8351 www.dipousa.com

BK Drop-In Induction Range Built-In Series with Separate Controls



Model	BK26-A	BK35-A	BK118-A
Power	Max 2600 W	Max 3500 W	Max 1800 W
Voltage	208/240 Volt 1ph 50/60 Hz		120 Volt 1ph 50/60 Hz
Connection	5' Cord, NEMA 6-20P		5' Cord, NEMA 5-20P
Package/Actual Weight	18/15 lbs.		
Package/Actual Dimensions	17" X 14" X 7" / 14 5/8" X 11 3/4" X 3 1/4"		
Warranty	1 Year		


Features

- Simple clean design
- Easy to operate
- Separate built in controls
- LED Display
- 4" required below for cooling
- Automatic over-temp shut off
- Automatic pan sensing
- Displays diagnostic/error codes
- Energy efficiency of about 90%

BK product dimensions shown.

Size countertop cutout to allow for sealing with a bead of silicone caulking.

- A:** 11 11/16" X 14 5/8" **C:** 5/16"
- B:** 3/8" **D:** 3 1/4"

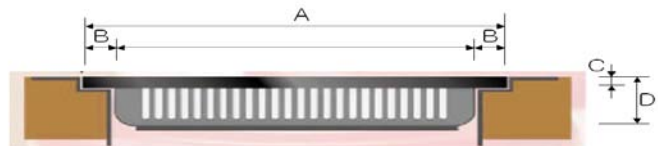

Accessories

- Stainless Steel Trim Ring
Simplifies Drop-In Installation

